

⚠ DETAIL A
DETAIL OF OPTIONAL PHOTO CONTROL
PHOTO CELL TO REPLACE CROSS ARM FINIAL WHEN REQUIRED
ALL PHOTO CELL ARMS TO BE MARKED "TYPE P"
N.T.S.

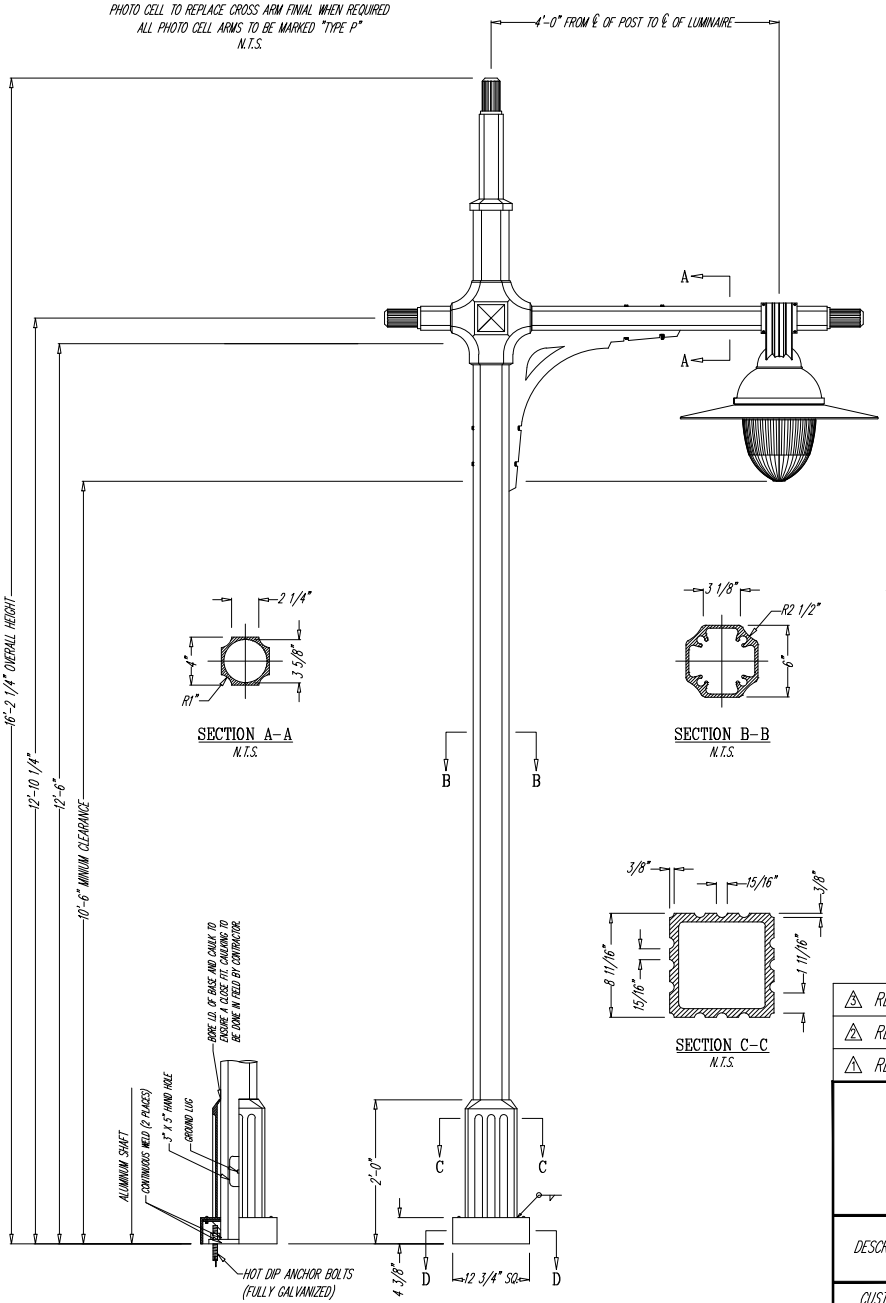

SECTION A–A
N.T.S.

SECTION B–B
N.T.S.

SECTION C–C
N.T.S.

LUMINAIRE SPECIFICATIONS

STYLE:	BREMERTON
HEIGHT:	29 3/4"
WIDTH:	33" DIA.
MATERIAL:	CAST AND SPUN ALUMINUM
GLOBE:	REFRACTIVE POLYCARBONATE
FINISH:	PRIME PAINT THEN FINISH PAINT, SHERWIN WILLIAMS ACROLON – LONG BEACH BLUE (RAL 5011)
LAMPING:	100 WATT HIGH PRESSURE SODIUM (LAMP BY OTHERS)
VOLTAGE:	QUAD WIRED AT 120
SOCKET:	MEDIUM BASE
DISTRIBUTION:	TYPE III (ASYMMETRIC DISTRIBUTION)
PHOTO CONTROL:	OPTIONAL TWIST LOCK PHOTO CELL

CROSS ARM SPECIFICATIONS

STYLE:	HUDSON RIVER PARK ROADWAY SINGLE
HEIGHT:	47 3/4"
WIDTH:	8'–0" FROM ℄ OF LUMINAIRE TO ℄ OF LUMINAIRE
MATERIAL:	CAST ALUMINUM
FINISH:	PRIME PAINT THEN FINISH PAINT, SHERWIN WILLIAMS ACROLON – LONG BEACH BLUE (RAL 5011)

LAMP POST SPECIFICATIONS

STYLE:	BREMERTON ALUMINUM
HEIGHT:	12'–6"
BASE:	12 3/4" SQUARE
MATERIAL:	
SHAFT:	EXTRUDED 6063–T6 ALUMINUM SHAFT
BASE:	1 PIECE (SLIP OVER), HEAVY WALL CAST ALUMINUM ALLOY A.N.S.I. 356, PER A.S.T.M. B26–95
FINISH:	PRIME PAINT THEN FINISH PAINT, SHERWIN WILLIAMS ACROLON – LONG BEACH BLUE (RAL 5011)
ACCESS DOOR:	NOT REQUIRED
GROUND STUD PROVISIONS:	DRILL AND TAP INSIDE WALL OF BASE TO ACCOMMODATE A 1/4"–20 GROUND STUD
ANCHOR BOLTS:	1" DIA. ANCHOR BOLTS
BOLT PROJECTION:	3" REQUIRED
PLEASE NOTE:	1. ALL HARDWARE SHALL BE STAINLESS STEEL 2. ALL VISIBLE HARDWARE SHALL BE FINISH PAINTED TO MATCH POST COLOR

⚠2 QUANTITY ..... 13 REQUIRED
STANDARD FINIAL (PHOTO CONTROL NOT REQUIRED)
PER S.O. #: 150710



⚠3 SECTION D–D
N.T.S.

⚠3 REVISED BY: B.K.R.	DATE: 05–09–06
⚠2 REVISED BY: B.K.R.	DATE: 02–28–06
⚠1 REVISED BY: B.K.R.	DATE: 03–31–04

DESCRIPTION	
CUSTOMER / JOB	

SCALE	DRAWN BY:	DATE	DRAWING NO.
N.T.S.	B.K.R.	03–09–04	LP–26116

City of Bremerton

PUBLIC WORKS

ENGINEERING DIVISION

CENTRAL BUSINESS DISTRICT
SINGLE FIXTURE LIGHT STANDARD

7023

Revision Date
3/10/16