
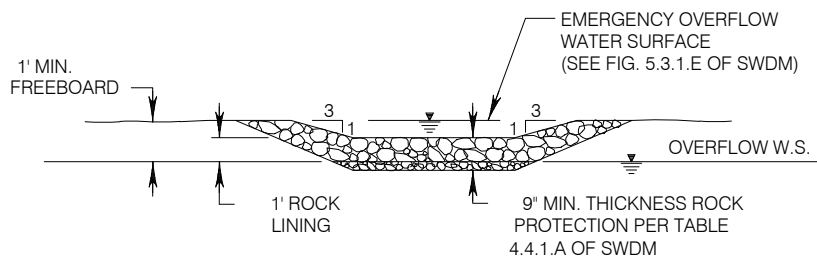
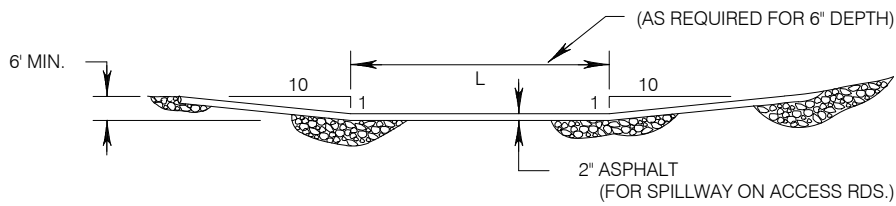


NOTE:


FOR WET PONDS, OR COMBINED DETENTION/WET PONDS:

1. INCREASE DEAD STORAGE TO 4' MIN., 6' MAX.
2. INSTALL A GATE VALVE @ BASE OF OUTFLOW STRUCTURE TO ALLOW FOR DRAINAGE OF THE POND.
3. FOR WET POND, DELETE RESTRICTION RISER.

DRY POND OUTFALL

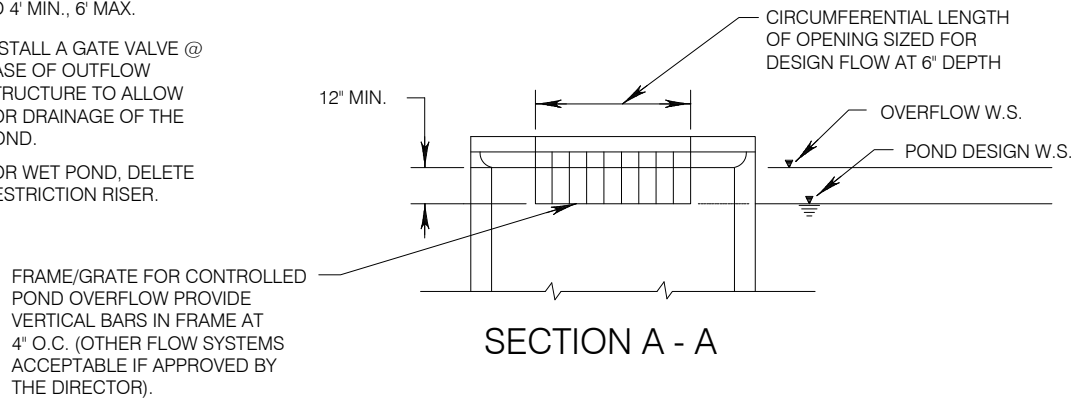

EMERGENCY OVERFLOW SPILLWAY

	<p>City of Bremerton</p> <hr style="width: 50%; margin: 0 auto;"/> <p>PUBLIC WORKS</p> <hr style="width: 50%; margin: 0 auto;"/> <p>DESIGN/CONSTRUCTION STANDARDS</p>	<p>DETENTION POND</p> <p>TYPICAL SECTION</p> <p style="font-size: small;">Alteration of this drawing is prohibited. Any approval of an altered drawing is unauthorized and void.</p>			
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center; padding: 5px;">4065</td> </tr> <tr> <td style="text-align: center; padding: 2px;">Revision Date</td> </tr> <tr> <td style="text-align: center; padding: 2px;">1/12/16</td> </tr> </table>	4065	Revision Date	1/12/16
4065					
Revision Date					
1/12/16					