


**IPL SERIES**

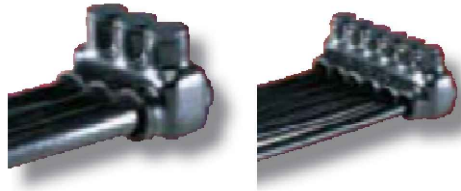

**POLARIS**

INSULATED MULTI-CARE CONNECTOR BLOCKS - WIRE ENTRY FROM ONE SIDE

IPL SERIES

IPL Series connectors are insulated with high-dielectric strength plastic. Molded for precise fit and supplied with removable access plugs over the hex screws. Wire entry ports on one side only. Eliminates the need for cover and taping. Abrasion and chemical resistant. UV rated. Will not support combustion. Cold temperature rated to -45°C. Dual rated for use with copper and/or aluminum Rated 600 V, 90°C. Not recommended for fine-stranded, flexible wire. To receive the material in bags, add "-B" to the part number.

CATALOG NO.	UPC CODE	NO. OF PORTS	WIRE RANGE	LENGTH	(INCHES)		HEX SIZE	CARTON QTY.	WEIGHT LBS. EA
					HEIGHT	WIDTH			
IPL 4-3	91001	3	4-14	1.54	1.5	1.12	slotted	12	.08
IPL	91021	3	4-14	1.54	1.5	1.12	1/8	12	.08
4-3A	91002	4	4-14	1.97	1.50	1.12	slotted	6	.11
IPL 4-4	91022	4	4-14	1.97	1.5	1.12	1/8	6	.11

**ERITECH HAMMERLOCK**

**Copper Grounding Connector**

**COPPER BONDED GROUND RODS**


Rod Size 5/8" (14.2 mm)


Part#

EHL58C1H

EHL58C1L

EHL58C1V



 CITY OF BREMERTON	<b>City of Bremerton</b>  <hr style="width: 50%; margin: auto;"/> <b>PUBLIC WORKS</b>  <hr style="width: 50%; margin: auto;"/> <b>ENGINEERING DIVISION</b>	<u>POLARIS CONNECTOR BLOCKS/</u> <u>ERITECH HAMMERLOCK</u>	7003  Revision Date 7/2022
--	--	---	-------------------------------------