




TWO LANE ROAD

OFFSET MARKER TO INDICATE WHICH SIDE OF STREET HYDRANT IS ON. MARKER TO BE PLACED 4" TO 6" OFF CENTERLINE.

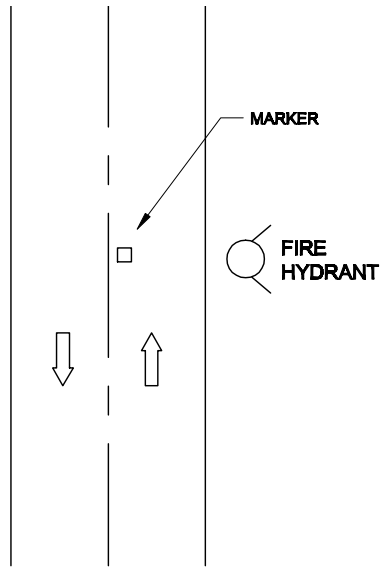


ON SIDE STREETS

WHERE THE HYDRANT IS WITHIN 20' OF THE MAIN TRAVELED STREET, THE MARKER IS TO BE INSTALLED 4" TO 6" OFF THE CENTERLINE.

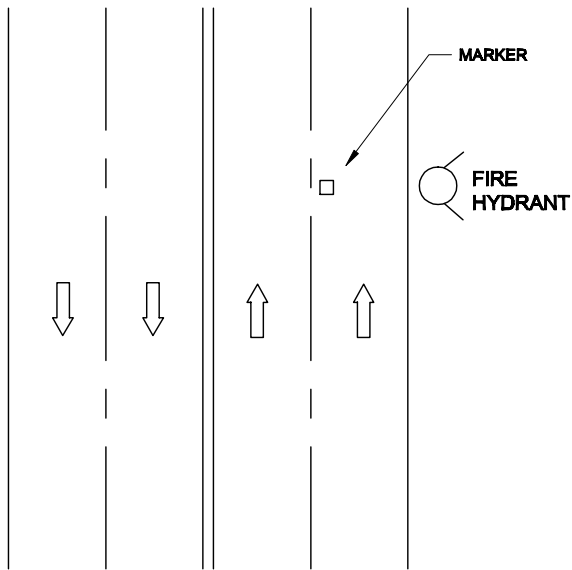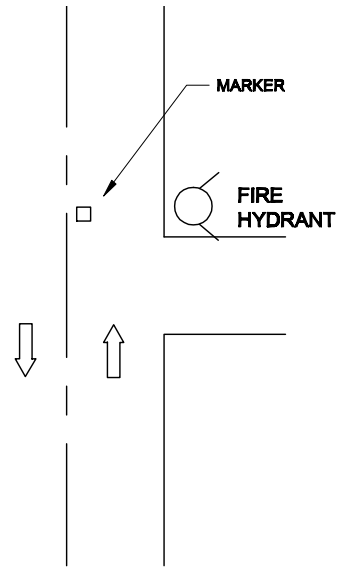

FOUR LANE ROAD

OFFSET MARKER TO INDICATE WHICH SIDE OF STREET HYDRANT IS ON. MARKER TO BE PLACED 4" TO 6" OFF THE DOTS OR PAINTED LINE DIVIDER.

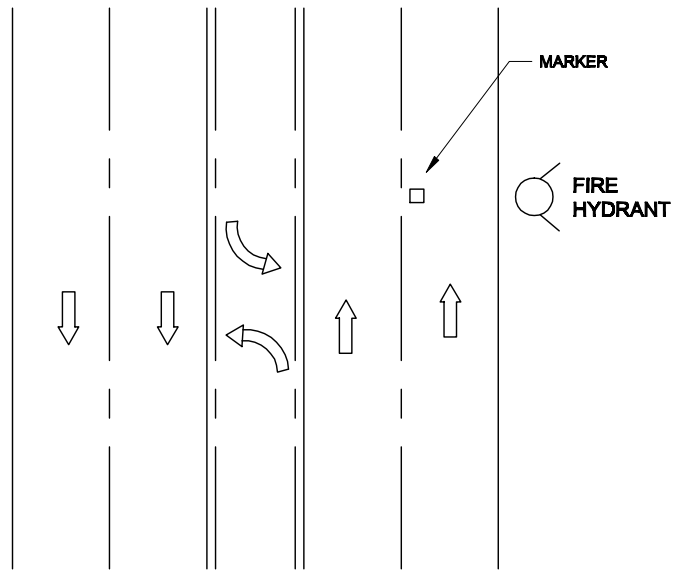

FIVE LANE STREETS

OFFSET MARKER TO INDICATE WHICH SIDE OF STREET HYDRANT IS ON. MARKER TO BE PLACED 4" TO 6" OFF THE DOTS OR PAINTED LINE DIVIDER.

NOTE

- (1) MARKER TO BE STIMSONITE 88 AB TWO-WAY (BLUE)



City of Bremerton

PUBLIC WORKS

DESIGN/CONSTRUCTION STANDARDS

**FIRE HYDRANT MARKER
PLACEMENT DETAIL**

Alteration of this drawing is prohibited. Any approval of an altered drawing is unauthorized and void.

5084

Revision Date
4/07/09