



ELEVATION VIEW

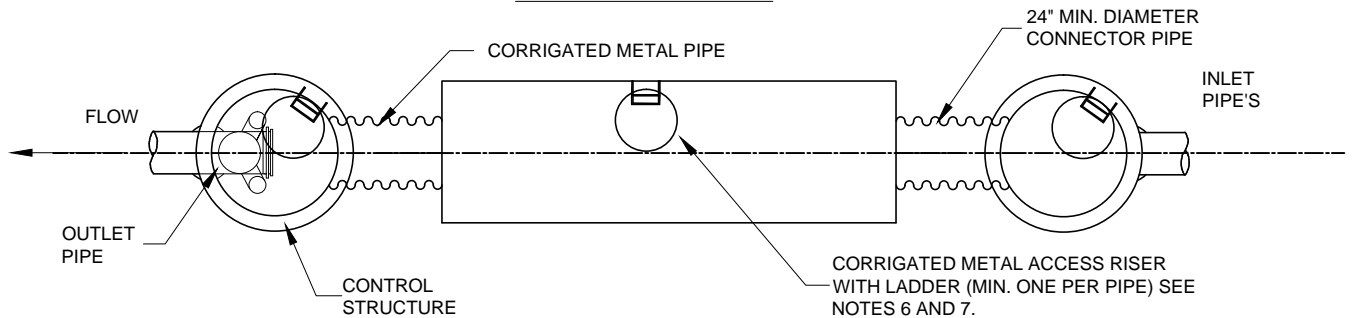

PLAN VIEW

NOTES:

1. NEOPRENE GASKETS REQUIRED AT ALL CMP AND CPE PIPE JOINTS.
2. 36" MINIMUM PIPE DIAMETER. WHERE DIAMETER IS LESS THAN 60", OMIT ACCESS RISER.
3. TYPE 2 CATCH BASIN AT EACH END OF PIPE (MAXIMUM SPACING SHALL BE 100 FEET).
4. ALL METAL PARTS SHALL BE CORROSION RESISTANT. STEEL PARTS SHALL BE GALVANIZED AND ASPHALT COATED (TREATMENT 1 OR BETTER). CAPACITY OF OUTLET PIPE MUST BE EQUAL TO OR GREATER THAN COMBINED INLETS.
5. ALL INLET PIPES COMBINED.
6. ACCESS RISERS REQUIRED CENTERED OVER EVERY 100' OF DETENTION PIPE WITH TYPE 2 CATCH BASINS PROVIDED ON EACH END. ADDITIONAL ACCESSES ARE REQUIRED FOR EVERY 50 ADDITIONAL FEET OF DETENTION PIPE. IN AREAS WITH VEHICULAR TRAFFIC, PROVIDE
7. TRAFFIC BEARING ACCESS (HS-20) OVER CORRUGATED METAL MANHOLE, PER AASHTO STANDARDS.
8. USE OF THIS DEVICE REQUIRES PREAPPROVAL FROM THE CITY ENGINEER.

	<h2 style="margin: 0;">City of Bremerton</h2>	<h2 style="margin: 0;">TYPICAL DETENTION SYSTEM</h2>	<h2 style="margin: 0;">4060</h2>
	<p style="margin: 0;">PUBLIC WORKS</p>	<p style="margin: 0; font-size: small;">Alteration of this drawing is prohibited. Any approval of an altered drawing is unauthorized and void.</p>	<p style="margin: 0; font-size: small;">Revision Date</p> <p style="margin: 0;">11/10/15</p>
<p style="margin: 0;">DESIGN/CONSTRUCTION STANDARDS</p>			